
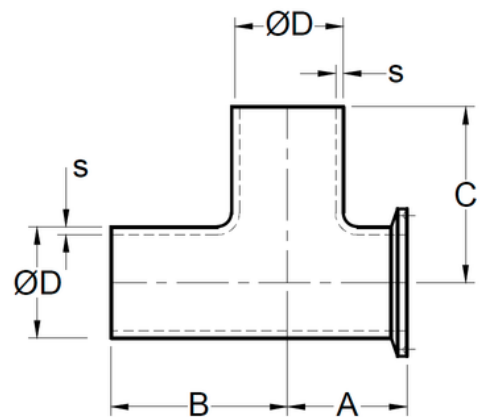


Conexiones Soldables x Clamp

Tee salida corta BPE, extremos AWF x Férula clamp x AWF

Hygienic Mechanical Joint: Short Outlet, Run Tee

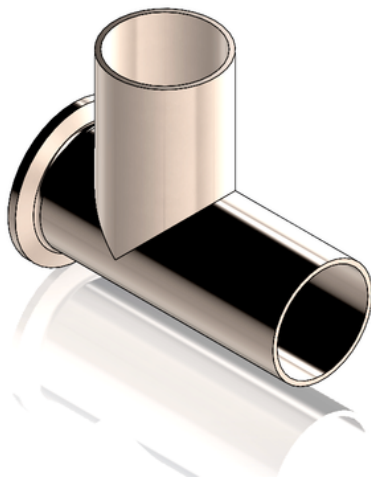

CODIGO	SIZE	ØD	A	B	C	s
A25 05	1/2"	0.500" 12.7 mm	0.875" 22.225 mm	1.875" 47.625 mm	1.875" 47.625 mm	0.065" 1.65 mm
A25 07	3/4"	0.750" 19.05 mm	1.000" 25.4 mm	2.000" 50.8 mm	2.000" 50.8 mm	0.065" 1.65 mm
A25 10	1"	1.000" 25.4 mm	1.125" 28.575 mm	2.125" 53.975 mm	2.125" 53.975 mm	0.065" 1.65 mm
A25 15	1-1/2"	1.500" 38.1 mm	1.375" 34.925 mm	2.375" 60.325 mm	2.375" 60.325 mm	0.065" 1.65 mm
A25 20	2"	2.000" 50.8 mm	1.625" 41.275 mm	2.875" 73.025 mm	2.875" 73.025 mm	0.065" 1.65 mm
A25 25	2-1/2"	2.500" 63.5 mm	1.875" 47.625 mm	3.125" 79.375 mm	3.125" 79.375 mm	0.065" 1.65 mm
A25 30	3"	3.000" 76.2 mm	2.125" 53.975 mm	3.375" 85.725 mm	3.375" 85.725 mm	0.065" 1.65 mm
A25 40	4"	4.000" 101.6 mm	2.750" 69.85 mm	4.125" 104.775 mm	4.125" 104.775 mm	0.083" 2.108 mm
A25 60	6"	6.000" 152.4 mm	4.625" 117.475 mm	5.625" 142.875 mm	5.625" 142.875 mm	0.109" 2.768 mm